



## i3PROJECTOR 3303W

i3PROJECTOR 3303W is a 3300-lumen ultra short throw projector that packs a multitude of features while delivering an extremely short throw distance for education and corporate applications. With its ability to be mounted to the wall directly above the screen on which it projects, this model helps to eliminate the shadows and glare typically found with standard projection systems. The 3303W includes a powerful 10W speaker, and its input panel includes dual HDMI, VGA and a microphone input to amplify the presenter's voice.

Because of its internal mirror, the i3PROJECTOR 3303W has a more compact design and the mirror is dust & scratch resistant.

### MAIN FEATURES

- Ultra short-throw projector
- Compact design
- Internal mirror: no dust & scratches possible
- Affordable lamp
- 3300 lumens \*
- WXGA 1280x800
- Aspect ratio 16:10
- Auto source
- Lamp life 5.000hrs (eco mode)
- Speaker 10W
- DLP technology




### EXTENDED LAMP WARRANTY EDUCATION EXCLUSIVE

Up to 3 years. (max. 2000 hours). Only valid after registration on [www.i3-learning.com](http://www.i3-learning.com)

## SPECIFICATIONS

Model name	<b>i3PROJECTOR 3303W</b>
Native Resolution	1280 x 800
Lamp	260W UHP Lamp
Brightness	3300 lumens*
Lamp life time (Normal/ Eco)	3500hrs/5000hrs (eco)
Contrast	15000:1
Offset Distance Tolerance	25mm
Lens/Zoom	
Throw ratio	Sealed design, anti-dust, anti-scratch
Image size (Diagonal)	TR 0.27 85" - 115"
Color wheel	6 segments
Acoustic Noise	Full mode: 35 ±2dB(A), Eco mode: 30 ±2dB(A)
Operation Temperature	For 0 -- 2500 ft, 5 -- 40 °C For 2500 -- 5000 ft, 5 -- 35 °C For 5000 -- 10000 ft, 5 -- 30 °C
Input	VGA X 1 - Audio Jack X 1 - Composite Video X 1 - Composite Audio X 1 HDMI X 2 - Microphone X 1 - RS-232C X 1 - Mini USB-B X 1 - RJ45 X 1 USB-A X 1 - Power X 1
Output	VGA X 1 - Phone Jack X 1(for interactivity) - Audio Jack X 1
No. of Colors	1.07B
Speaker	10W x1
Keystone	Manual keystone
OSD Languages	18 (English / German / French / Italian / Spanish / Polish / Swedish / Dutch / Portuguese / Japanese / Traditional Chinese / Simplified Chinese / Korean / Russian / Arabic / Norse /Turkish
Power Supply	Universal AC 100 – 240 V ~ 50-60 Hz with PFC input
Power consumption	320W (normal) - 270W (eco)
Standby Power	< 0.5W
Remote Control	IR
Dimension	Width x Depth x Height = 383mm x 308mm x 86mm
Weight	5.5kg (12.1lb)

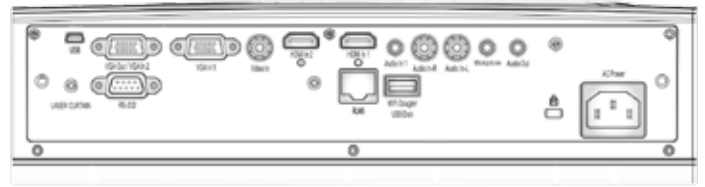

Exclusive design by i3 Technologies - subject to change

## ACCESSORIES

Power cord	1	1.8m
VGA cable	1	1.8m
Remote Control	1	Card type, with battery
Documentation	1	User manual in 18 languages**

Without lens cap, without soft case

## WARRANTY

Projectors 3 years  
Lamp 6 months, max. 1000 hrs

\* referring to marketing measurements

# Newcandle-shops



Beamers & Touchscreens.nl



3Dprinter & Onderwijs.nl



MK-Beamerlampen.nl



Whiteboards & Prikborden.nl