


Key Features

- Draadloze presentatie tussen apparaten en diverse ruimtes
- Eenvoudig Casten van functies met USB-C / HDMI dongle
- USB flash drive plug-and-play voor foto's, muziek en video
- Multitasking met krachtige ingebouwde mediaspeler & OPS PC slot
- 4K commercial display met dunne rand



Product Description

De ViewSonic is een 65" 4K draadloos presentatiedisplay. Met de ingebouwde software voor het delen van schermen *, ViewBoard® Cast and Display en ViewBoard® Cast USB-C / HDMI-dongles kunnen meerdere gebruikers, zowel on-site als on-line, deelnemen aan conferenties en inhoud met elkaar delen. Tegelijkertijd transformeert u de CDE6520 in een dynamische contenthub. Deze betrouwbare commerciële display is uitgerust met een quad-core processor en intern geheugen, waardoor constant multimedia kan worden afgespeeld vanaf interne opslag of een USB-stick. De ViewSonic® CDE6520 ondersteunt externe configuratie- en contentbeheersystemen en is ook geschikt voor diverse signage-toepassingen. *ondersteunt Chrome, Android, Windows, Mac OS, en iOS

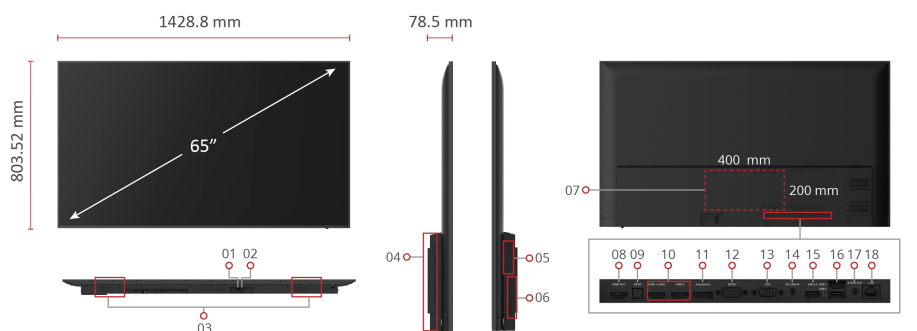

1. AC In
2. Power Switch
3. Internal Speakers
4. OPS Slot
5. WiFi Slot
6. Menu Controls
7. VESA® Wall Mount 400x200mm

8. HDMI Out
9. SPDIF
10. HDMI In x 2
11. DisplayPort
12. RS232
13. VGA
14. Audio In

15. USB 3.0 Type A (USB Playback)
16. USB 2.0 Type A x 2 (USB Playback)
17. Audio Out
18. LAN

DISPLAY

Panel Size:	65"
Type/ Tech:	TFT LCD Module. IPS type, DLED backlight
Display Area (mm):	1428.48(H) × 803.52(V) (65" diagonal)
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	1.07G colors
Brightness:	450 nits (typ.)
Contrast Ratio:	1200:1 Typ.
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	30,000 Hours (min)
Surface Treatment:	Anti-glare, 3H hardness, Haze 25%
Bezel:	Slim
Orientation:	Landscape

TOUCH

INPUT

HDMI:	x2
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1 (3.5mm)
RS-232:	x1
OPS:	x1 (OPS slot)
WiFi:	x1 (Optional WiFi module)

OUTPUT

HDMI:	x1
Audio:	x1 (3.5mm)
SPDIF:	x1 (Fiber)

LAN

RJ45:	x1
-------	----

USB

Type A:	2.0 Type A : x 2 (USB Playback), 3.0 Type A : x 1 (USB Playback)
---------	--

MICRO SD CARD SLOT

SPEAKERS

SPEAKERS:	Max. 16Wx2
-----------	------------

COMPATIBILITY

RGB PC/HDMI PC:	Up to 1920x1080@60Hz. Refer to timing table
HDMI:	480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz
DisplayPort:	480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz
Android Version:	Android 8.0

POWER

Voltage:	100V-240V, 50/60Hz (AC)
Consumption:	Normal 220 W, Max 300 W

ERGONOMICS

Wall Mount (VESA®):	400x200 mm
---------------------	------------

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	20% ~ 80% non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	57.11 x 32.60 x 3.09 in/ 1450.6 x 828.1 x 78.5 mm
Packaging (inch / mm):	63.19 x 37.99 x 8.66 in/1605 x 965 x 220 mm

WEIGHT

Net (lb / kg):	22.95 kg / 50.59 lbs (w/o stand)
Gross (lb / kg):	33.6 kg/74.07 lbs

REGULATIONS

REGULATIONS:	cULus, FCC, Energy Star, EPEAT, MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, Custom Union, UkrSEPRO, RCM, MEPS
--------------	--

PACKAGE CONTENTS

PACKAGE CONTENTS:	1. CDE6520 commercial display, 2. Remote control with batteries, 3. Quick start guide, 4. Power cables (1.5mm), 5. HDMI cable, 6. Wall mount screw, 7. RS232 adapter
-------------------	--